

**D8oS-7**

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities		
					D8oS-7		
					Tilt Angle		Load Capacities
					Double Pneumatic		Double Pneumatic
	mm	mm	mm	mm	FWD deg	BWD deg	LC600mm kg
STD	3,100	2,835	4,375	215	15	10	8,000
	3,300	2,935	4,575	215	15	10	8,000
	3,600	3,085	4,875	215	15	10	8,000
	4,100	3,435	5,375	215	15	10	8,000
	4,600	3,685	5,875	215	15	10	8,000
	5,100	3,935	6,375	215	15	10	8,000
	5,600	4,185	6,875	215	15	10	8,000
FFT	4,350	2,630	5,625	1,420	15	10	8,000
	4,800	2,780	6,075	1,570	15	10	8,000
	5,400	2,980	6,675	1,770	15	10	8,000
	5,850	3,130	7,125	1,920	15	10	7,900

D9oS-7

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities		
					D9oS-7		
					Tilt Angle		Load Capacities
					Double Pneumatic		Double Pneumatic
	mm	mm	mm	mm	FWD deg	BWD deg	LC600mm kg
STD	3,100	2,835	4,375	215	15	10	9,000
	3,300	2,935	4,575	215	15	10	9,000
	3,600	3,085	4,875	215	15	10	9,000
	4,100	3,435	5,375	215	15	10	9,000
	4,600	3,685	5,875	215	15	10	9,000
	5,100	3,935	6,375	215	15	10	9,000
	5,600	4,185	6,875	215	15	10	9,000
FFT	4,350	2,630	5,625	1,420	15	10	9,000
	4,800	2,780	6,075	1,570	15	10	9,000
	5,400	2,980	6,675	1,770	15	10	9,000
	5,850	3,130	7,125	1,920	15	10	8,850

Note: Mast Specifications & Rated Capacities are based on standard chassis with dual pneumatic tire and without side shifter.

7 Series Forklifts

Pneumatic Diesel 6 to 9 ton Series

Euro Stage IIIB / Euro Stage IV



Doosan Industrial Vehicle Europe nv
Europark-Noord 36A
9100 Sint-Niklaas
Belgium
Tel.: +32 3 760 09 87
Fax: +32 3 760 09 89
Website: www.doosan-iv.eu

AUTHORIZED DEALER

EUD7oS7-160512v3EN (May 2016)


Lifting Your Dreams

GENERAL SPECIFICATIONS

CHARACTERISTICS				Tier IV / Stage IV			
1	Model			D6o5-7	D7o5-7	D8o5-7	D9o5-7
2	Capacity	at rated load center	kg	6,000	7,000	8,000	9,000
3	Load center	distance	mm	600	600	600	600
4	Power type			diesel	diesel	diesel	diesel
5	Operator type			driver-seated	driver-seated	driver-seated	driver-seated
6	Tire type	C=cushion, P=pneumatic, E=Solid		P/E	P/E	P/E	P/E
7	Wheels (x=driven)	number, front/rear		x 4/2	x 4/2	x 4/2	x 4/2
DIMENSIONS							
8	Maximum fork height	with STD 2-stage mast	mm	3,000	3,000	3,100	3,100
9	Free lift		mm	205	205	215	215
10	Fork carriage	ISO class		IV	IV	V	V
11	Forks	thickness x Width x Length	mm	60x180x1,200	60x180x1,200	70x180x1,200	70x180x1,200
12		fork spacing (min X Max)	mm	410x2,032	410x2,032	410x2,092	410x2,092
13	Tilt of mast	forward / Backward	deg	15/10	15/10	15/10	15/10
14	Overall dimensions	length to forkface	mm	3,618	3,697	4,014	4,040
15		width	mm	2,108	2,108	2,230	2,230
16		mast lowered height	mm	2,500	2,500	2,835	2,835
17		mast extended height	mm	4,340	4,340	4,375	4,375
18		overhead guard height (cabin)	mm	2,468 (2,535)	2,468 (2,535)	2,673 (2,771)	2,673 (2,771)
19		seat height	mm	1,455	1,455	1,526	1,526
20	Minimum outside turning radius		mm	3,380	3,430	3,650	3,680
20a	Minimum internal turning radius		mm	1,279	1,279	1,432	1,432
21	Load moment constant		mm	632	632	725	725
21a	Right angle stacking aisle width	pallet 1,000 x 1,200 crossways	mm	5,212	5,262	5,575	5,605
21b	(with pallets and clearance)	pallet 800 x 1,200 lengthways	mm	5,012	5,062	5,375	5,405
PERFORMANCE							
22	Speed	travel, loaded/unloaded	km/h	23.0/25.0	30/33.6	22.6/24.6	29.1/33.3
23		lift, loaded/unloaded	mm/s	400/430	480/540	380/430	430/470
24		lowering, loaded/unloaded	mm/s	500/450	500/450	500/450	500/450
25	Drawbar pull	at 1.6 km/h, loaded	kg	4,668	6,196	4630	6,153
26	Gradeability	at 1.6 km/h, loaded	%	33.1	45	28.8	39
WEIGHT							
27	Total weight	unloaded	kg	8,940	9,093	9,630	9,783
28	Axle load	with load, front/rear	kg	13,285/1,655	13,416/1,677	14,655/1,975	14,786/1,997
29		without load, front/rear	kg	4,050/4,890	4,181/4,912	3,900/5,730	4,031/5,752
CHASSIS							
30	Tires	number of front/rear		4/2	4/2	4/2	4/2
31		size, front		8.25x15-14PR	8.25x15-14PR	9.00x20-14PR	9.00x20-14PR
32		size, rear		8.25x15-14PR	8.25x15-14PR	9.00x20-14PR	9.00x20-14PR
33	Wheel base		mm	2,300	2,300	2,500	2,500
34	Tread	front/rear	mm	1,584/1,550	1,584/1,550	1,668/1,750	1,668/1,750
35	Ground clearance	loaded, at the lowest point	mm	196	196	258	258
36		loaded, at center of wheelbase	mm	225	225	329	329
37	Brakes	service brake		disc	disc	disc	disc
38		parking brake		rachet	rachet	rachet	rachet
DRIVE							
39	Battery	voltage/capacity	V/AH	24/75	24/75	24/75	24/75
40	Engine	manufacturer		Doosan	Doosan	Doosan	Doosan
41		model		D34NAP D34P	D34NAP D34P	D34P D34P	D34P
42		rated output (at rpm)	kW/rpm	55.0/2,300	80.4/2,300	55.0/2,300	80.4/2,300
43		max. Torque	Nm/rpm	330/1,400	375/1600	330/1,400	375/1600
44		cycle/cylinders/displacement	cc	4/4/3,409	4/4/3,409	4/4/3,409	4/4/3,409
45	Transmission	type		power shift	full auto shift	power shift	full auto shift
46	Operating pressure	number of speeds forward/reverse		2/2	3/3	2/2	3/3
46	Operating pressure	system/attachment	bar	190/140	210/140	220/140	235/140

Note : Specification values quoted in this specification sheet have been rounded. Performance may vary due to operation conditions. Products and specifications are subject to improvement and change without prior notices.

DIMENSIONAL DRAWING

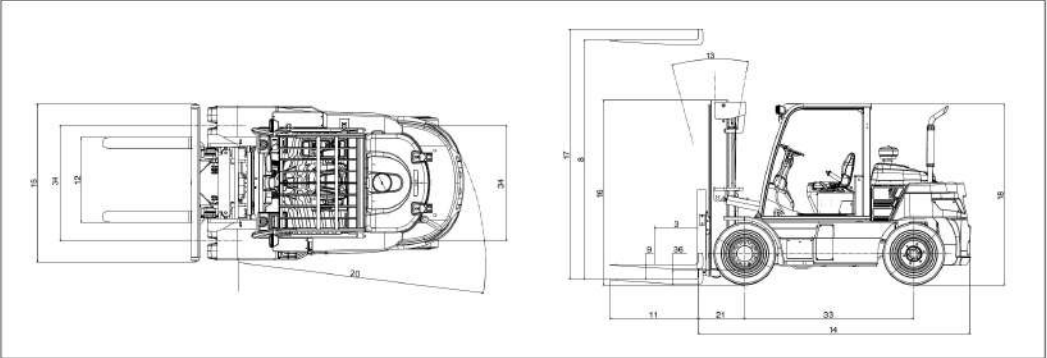

MAST SPECIFICATIONS and RATED CAPACITIES

D6oS-7

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities		
					D6oS-7		
			With Load Backrest	With Load Backrest	Tilt Angle		Load Capacities
					Double Pneumatic		Double Pneumatic
	mm	mm	mm	mm	deg	deg	kg
STD	3,000	2,495	4,275	205	15	10	6,000
	3,500	2,745	4,775	205	15	10	6,000
	3,700	2,845	4,975	205	15	10	6,000
	4,000	2,995	5,275	205	15	10	6,000
	4,500	3,345	5,775	205	15	10	6,000
	5,000	3,595	6,275	205	15	10	6,000
	5,500	3,845	6,775	205	15	10	5,875
FFT	6,000	4,095	7,275	205	15	10	5,675
	4,550	2,540	5,570	1,580	15	10	5,900
	5,000	2,690	6,020	1,730	15	10	5,725
	5,600	2,890	6,620	1,930	15	10	5,500
	6,050	3,040	7,070	2,080	15	10	5,300

D7oS-7

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities		
					D7oS-7		
			With Load Backrest	With Load Backrest	Tilt Angle		Load Capacities
					Double Pneumatic		Double Pneumatic
	mm	mm	mm	mm	deg	deg	kg
STD	3,000	2,495	4,275	205	15	10	7,000
	3,500	2,745	4,775	205	15	10	7,000
	3,700	2,845	4,975	205	15	10	7,000
	4,000	2,995	5,275	205	15	10	7,000
	4,500	3,345	5,775	205	15	10	7,000
	5,000	3,595	6,275	205	15	10	7,000
	5,500	3,845	6,775	205	15	10	7,000
FFT	6,000	4,095	7,275	205	15	10	6,900
	4,550	2,540	5,570	1,580	15	10	7,000
	5,000	2,690	6,020	1,730	15	10	7,000
	5,600	2,890	6,620	1,930	15	10	6,725
	6,050	3,040	7,070	2,080	15	10	6,500

Note : Mast Specifications & Rated Capacities are based on standard chassis with dual pneumatic tire and without side shifter.