


Lonking 龙工
Efficiency Rules the Future

LG16B/20B/25B

Equipped with AC motor, powerful and economical
Higher Travelling speed, stable and efficient



	LG16B	LG20B	LG25B
■ Battery(V/AH):	48/450	48/600	48/600
■ Rated Capacity (kg):	1600	2000	2500
■ Power Type:	Battery	Battery	Battery

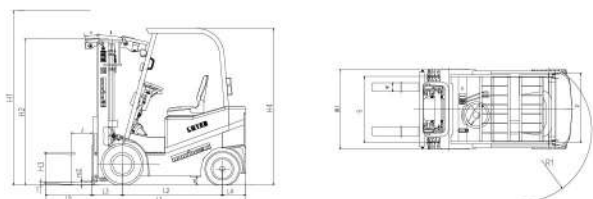

MODEL	LG16B	LG20B(Q)	LG25B(Q)
Power type	Battery	Battery	Battery
Rated capacity(kg)	1600	2000	2500
J Load center(mm)	500	500	500
H1 STD Max lifting height(mm)	3000	3000	3000
H3 Free lifting height(mm)	105	160	160
L5*W*T STD Fork size(mm)	920x100x35	1070x120x40	1070x120x40
Mast tilt angle(deg)	6/12	6/12	6/12
L3 Front overhang(mm)	410	460	460
Overall dimension			
L1 Overall length(mm)	3018	3430	3430
W1 Overall width(mm)	1080	1150	1150
H2 STD Mast lowered height(mm)	1987	2012	2012
H4 Overhead guard height(mm)	2135	2210	2210
R1 Min.turning radius(mm)	1900	2150	2150
Performance Data			
Max.traveling speed(km/h)load/unload	12/14	12/14	12/14
Max.lifting speed(mm/s)load/unload	260/420	280/440	260/420
Max.gradient(%)	12/15	15	15
Self weight(kg)	3880	3900	4150
S/P Tread(front/rear)(mm)	890/920	950/930	950/930
L2 Axle distance (mm)	1370	1500	1500
Min.ground clearance(m1)	130	173	173
Tire	Front	6.5-10-10PR	7.00-12-12PR
	Rear	5.00-8-10PR	16×7-8-14PR
Motor	Travel(kw)	7.5	11
	Lift(kw)	10	12
Battery(V/AH)	48/450	48/600	48/600
Working pressure(M pa)	14.5	17.5	17.5
Controller	ZAPI	ZAPI	ZAPI

Lonking (FZ) GROUP INTERNATIONAL TRADE CO., LTD.
Lonking Holdings Limited
Add:26 Minyi Road,Xinqiao,Songjiang Industrial Zone,Shanghai
P.C: 201612
Tel: +86-21-3760 2000-5657
http://www.lonkinggroup.com
E-mail:export@lonking.cn
Lonking, Lonking (FZ) Group and their respective signs, as well as corporate identity in this booklet are trademarks of Lonking Holdings Ltd.
and may not be used without written permission.
2017103

For more information on Lonking products,
please visit www.lonkinggroup.com

Specifications and design are subject to change without prior notice.
Machines shown may not include optional accessories.